


Slide gate (Motorized)

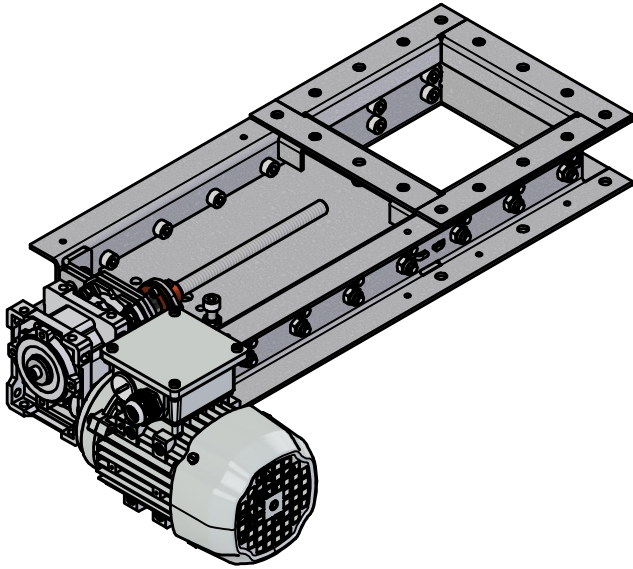


Product description

Primarily designed for bulk grain handling in agriculture, but it can also be used for plastic granules and other mildly abrasive materials. It provides continuously adjustable, precise, and uniform material flow control, and can also function as a shut-off device. Its primary application is for silos, where automated and reliable flow regulation is required.

Features:

- Material: DC01
- Thickness: 3 mm
- Surface treatment: Electro-galvanized
- Operation: Geared electric motor (220-240/380-420 V)
- Installation: Suitable for installation in vertical pipelines

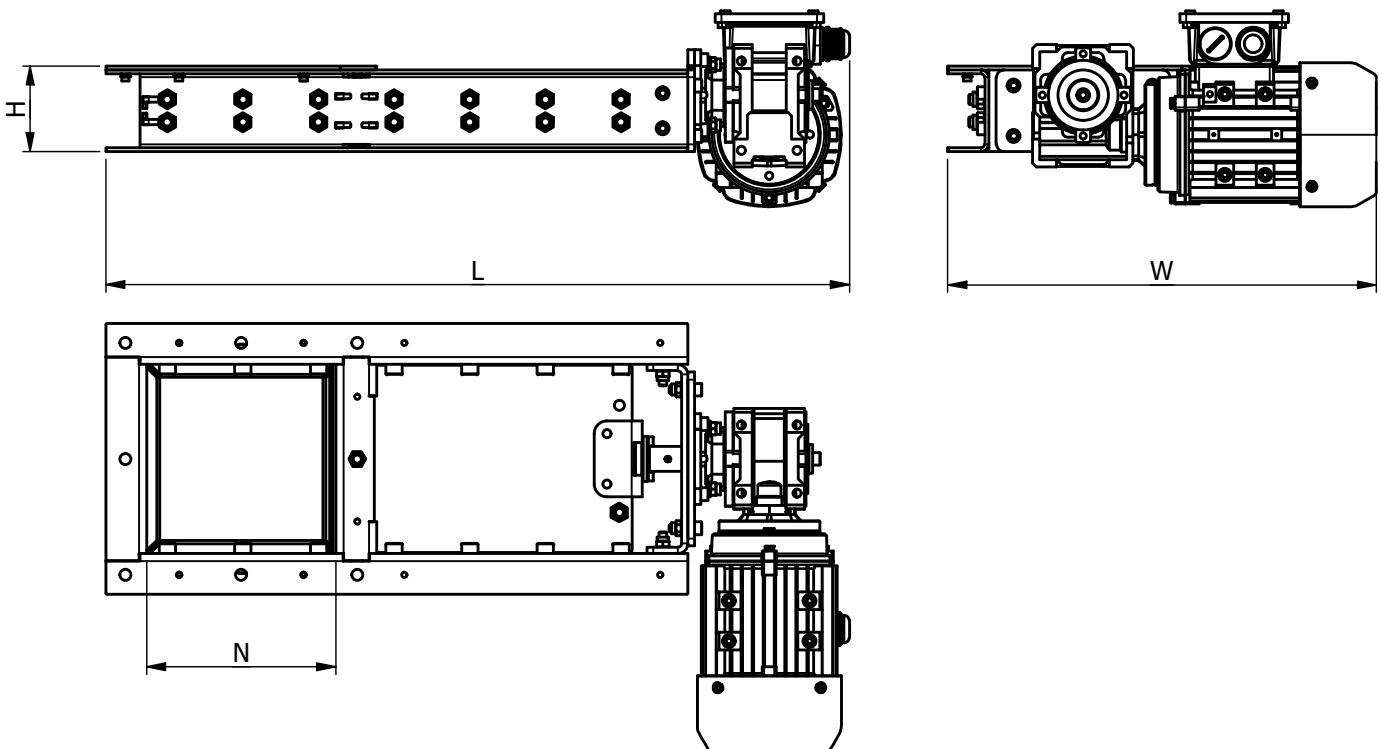

Part number	Inlet (N)	Size (W x H x L)	Sensor
GV15-M	150 mm	338x68x590 mm	GV15-SE
GV20-M	200 mm	363x68x690 mm	GV20-SE
GV30-M	300 mm	432x68x900 mm	GV30-SE

PLACE ORDER
click here!